


;E S\$ A

GQ3008M

1~8

RS232/485/422 /

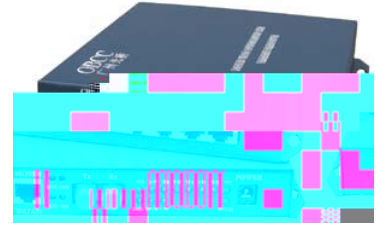


### 产品特点

- 1 1 8 ( )
- 2 1 100M ( )
- 3
- 4 0 120KM
- 5
- 6
- 7
- 8

### 用户接口

FXO --

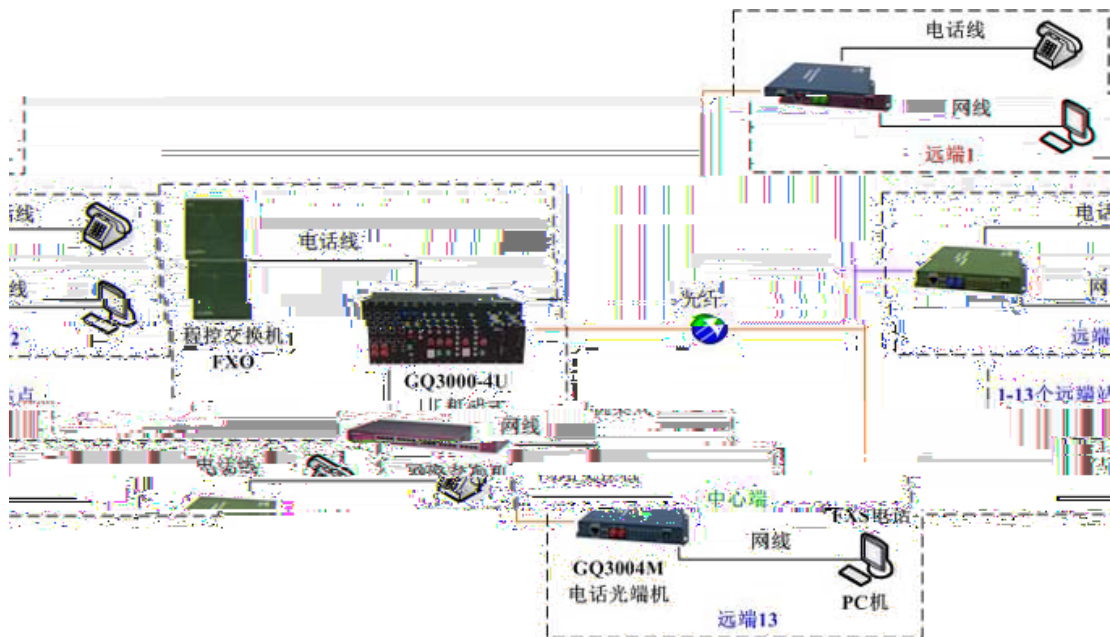

### 技术指标

:155Mbps w 20ppm  
 850nm 1310nm 1550nm  
 > -12dB  
 :< -36dBm  
 :FC ( SC/ST );

: 600»  
 :-3w 0.75dB  
 :300 3400Hz(-0.6 +3dB)  
 : 65dB  
 : RJ45

#

&S\$» Ž\*, \$» ppS"%C :

58	% X6	85	! & X6
58	! S" & ! ŽS" & X6	85	! S" & ! ŽS" & X6
58	! S" & ! ŽS" & X6	85	! S" & ! ŽS" & X6
( SX6	+SX6		
+SX6		' SX6	
*) X6		*SS»	

=999', S&' #, S&' i =999', S&' %EIJ@5BL

%\$#%\$SA

/

F>() ·

FG& &#J" &

77=HH J" &

% &\$\$Vdg

..

% Saa I % Saa I' \*aa

..

220V

40W